


LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	APVD
CM	00	K1		REVISED PER ECO-11-004587	11MAR11	RK HMR

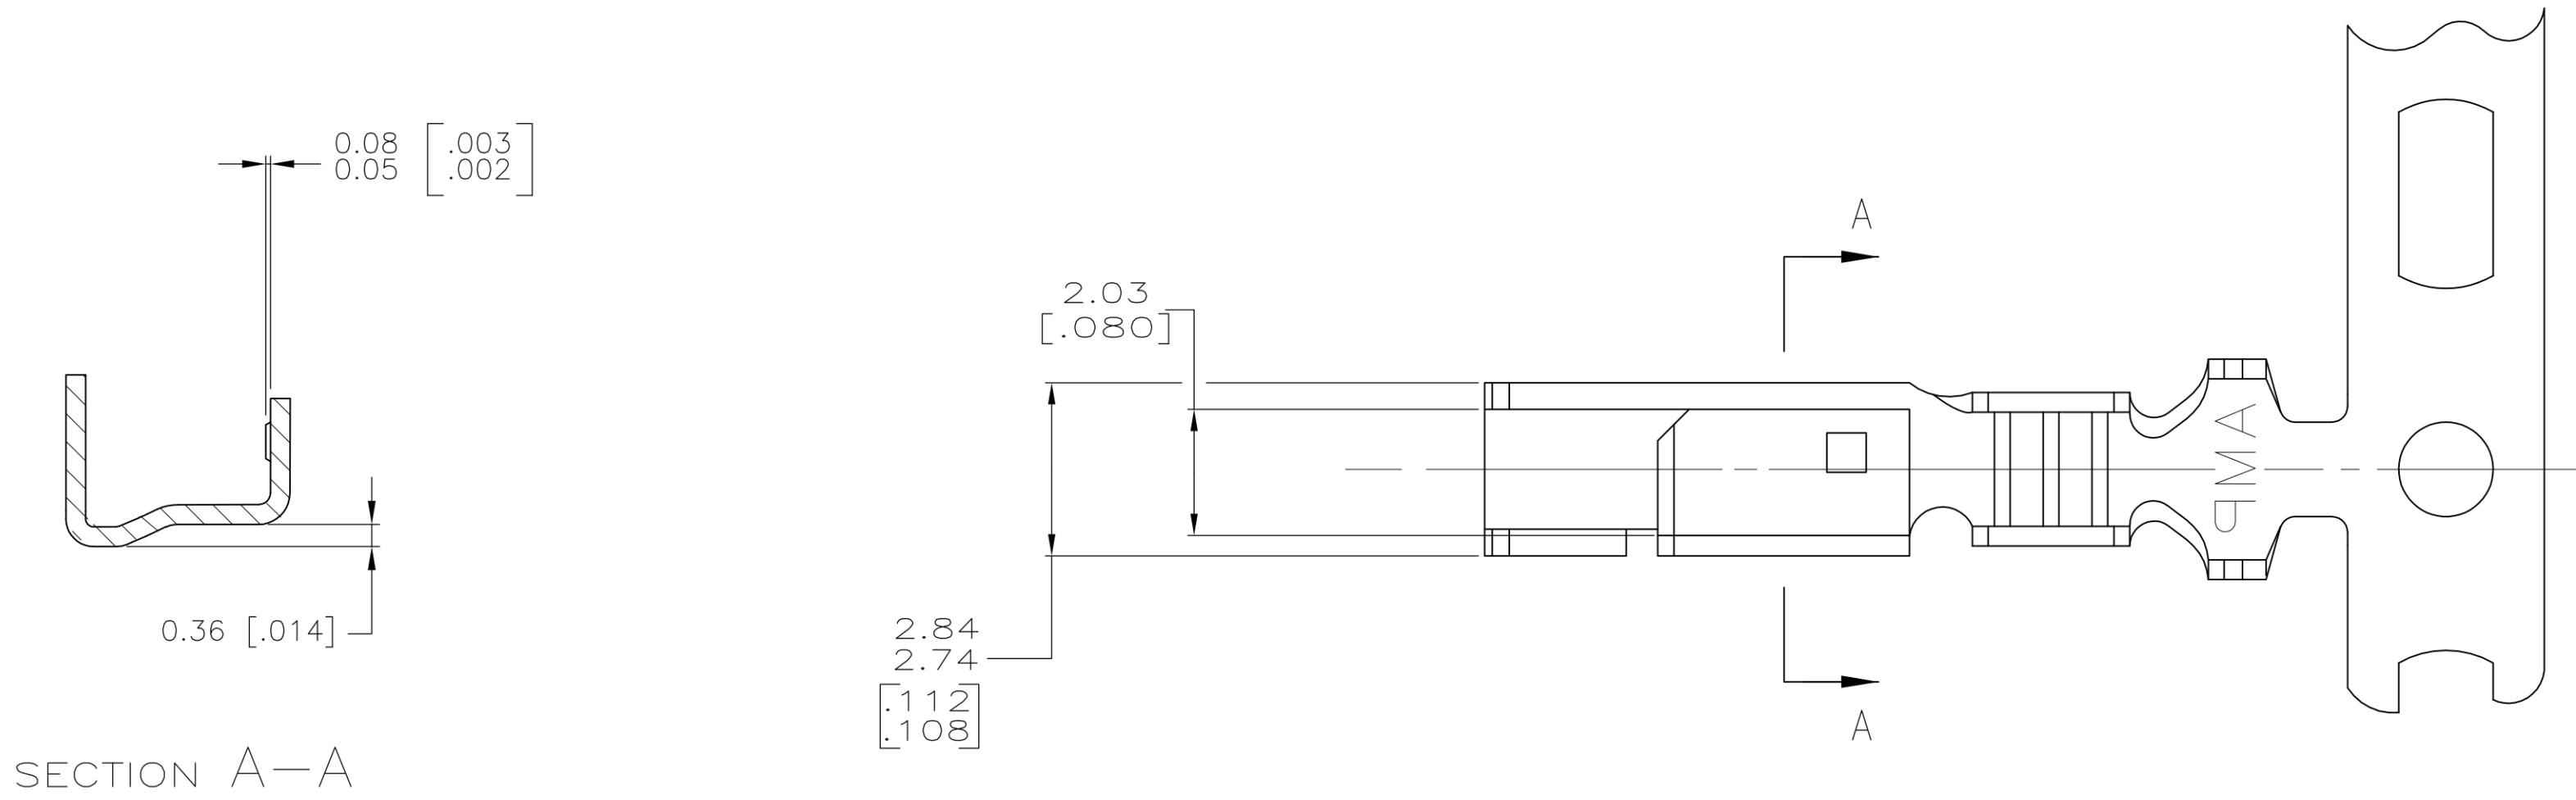


1. INSULATION RANGE: 1.09-2.79 [.043-.110]
WIRE RANGE: 0.2-0.9 mm² (24-18) AWG.

2. 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER
0.00127 [.000050] MIN NICKEL.

3. 0.00076 [.000030] MIN THICK GOLD STRIPES IN
LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER
0.00127 [.000050] MIN THICK NICKEL OVER ENTIRE
CONTACT.

4. DIMENSIONS IN BRACKETS ARE IN INCHES.

5. 0.00203 [.000080] MIN TIN OVER
0.00127 [.000050] MIN NICKEL.

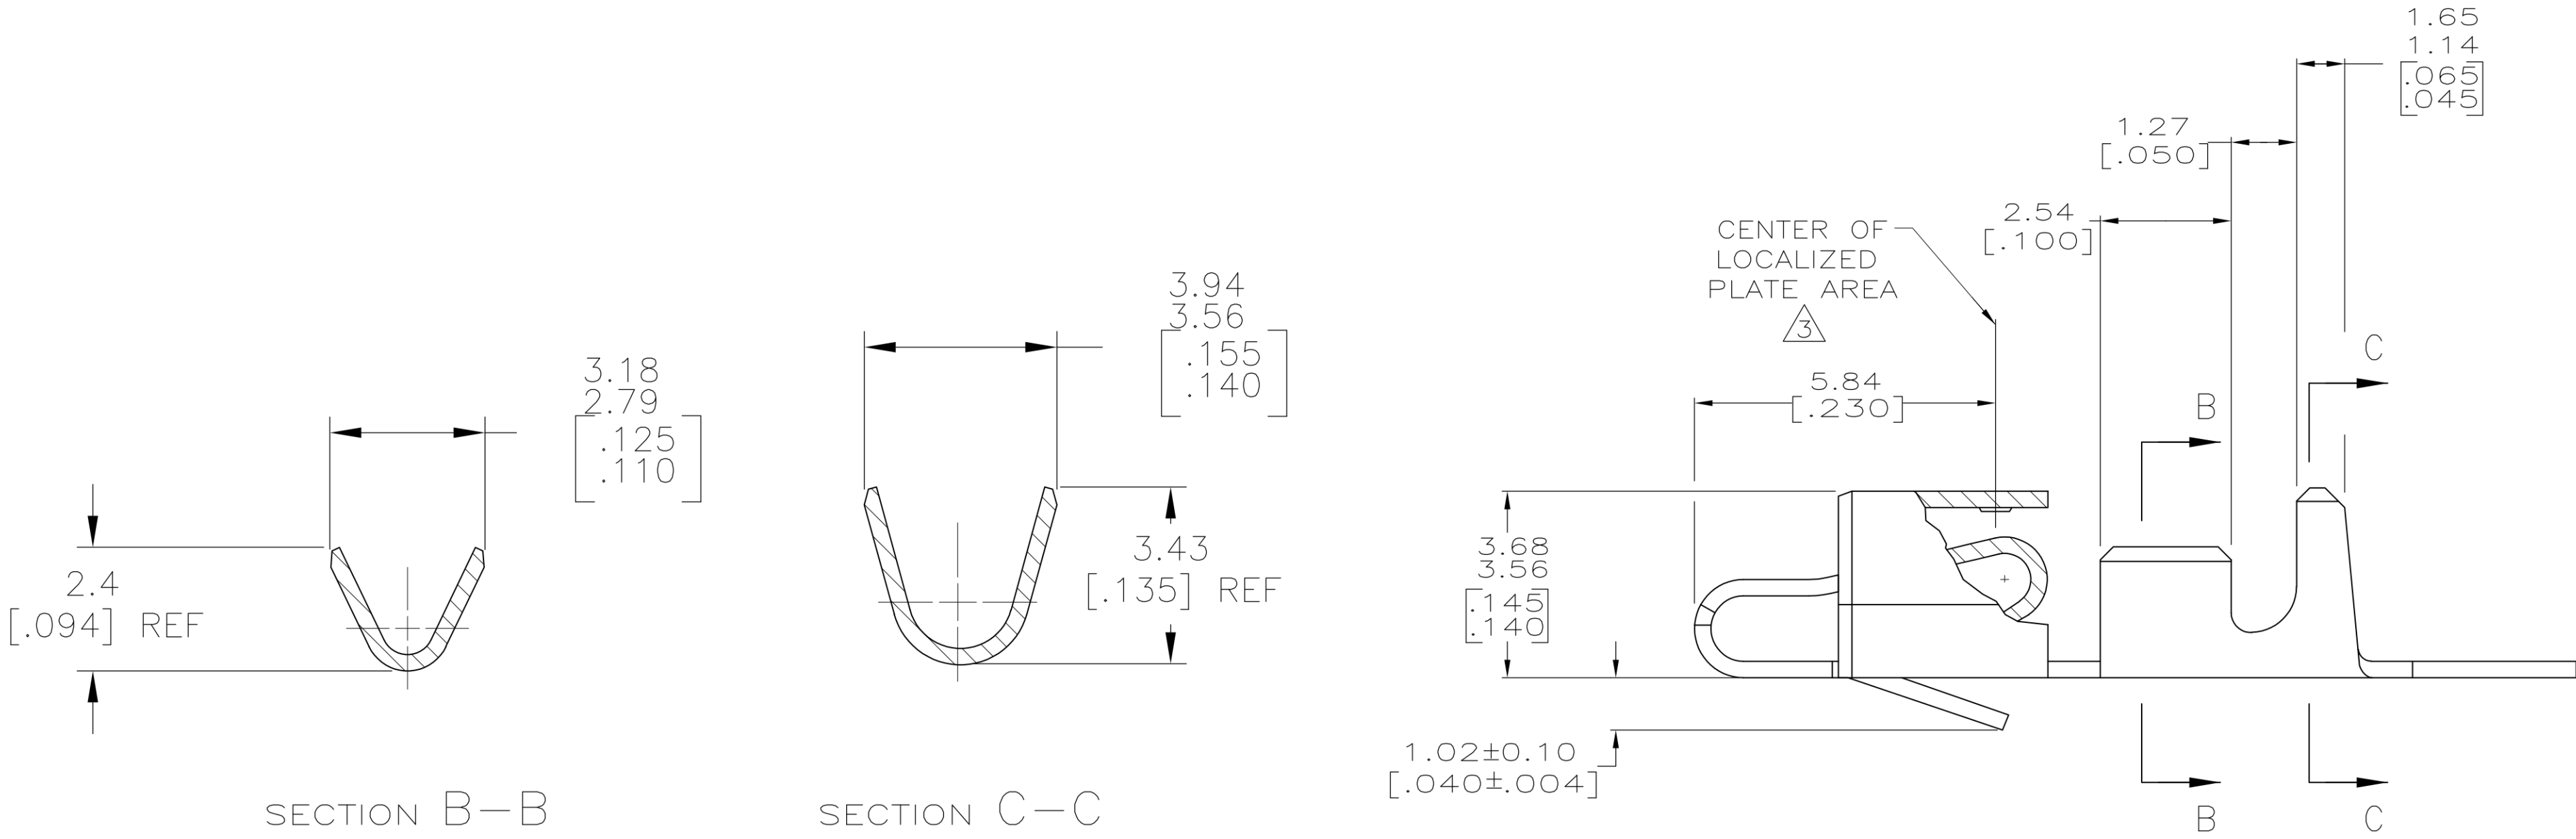

5	3-770476-1
3	770476-2
2	770476-1
FINISH	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	18OCT2004	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J. ELLIS	-	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ELLIS	-	PRODUCT SPEC	
0. PLC ± -		APPLICATION SPEC		SIZE	
1. PLC ± -		WEIGHT		CAGE CODE	
2. PLC ± -		CUSTOMER DRAWING		DRAWING NO	
3. PLC ± .005		SCALE		RESTRICTED TO	
4. PLC ± -		10:1		A1 00779C=770476	
ANGLES ± 0°30'		SHEET		1 OF 1	
MATERIAL		REV		K1	
FINISH		10:1		10:1	